SEC-201L BOTTOM MOUNT LIQUID FILLED

Our 'SEC-200L' series gauge line is a quality line of liquid filled pressure gauges. The glycerine filling helps dampen the effects of pulsation and vibration, while also perpetually lubricating the movement (and keeping contaminates such as dirt away from all moving parts) which will extend the life of the gauge.

This gauge has been specifically designed with original equipment manufacturers in mind. It is typically used on hydraulic & pneumatic systems as well as any commercial or industrial application not corrosive to brass and bronze wetted parts where glycerine filling is suitable for use.

SPECIFICATIONS:

- **Dial Sizes:** 2 ½"
- **Connection Sizes:** 1/4"NPT
- **Stainless Steel Case And Bezel**
- **Brass Internals & Connection** (with built-in snubber)
- **Phosphor Bronze Bourdon Tube**
- **Plastic Lens**
- **Liquid Filled**
- **Accuracy :** 3-2-3 %
- **Dual Scale: PSI & Bar (x100=kPa)**
- **Ambient temperature:** 30˚F to 160˚F

RANGE	CODE	Major In	Minor inc.
30/0"VAC	A	5	0.5
30/0/15	CB	5	0.5
30/0/30	CC	10	1
30/0/60	CD	10	1
30/0/100	CE	20	2
30/0/150	CF	20	2
30/0/300	CH	50	10
0/15	B	2	0.2
0/30	C	5	0.5
0/60	D	10	1
0/100	E	20	2
0/160	F	20	2
0/200	G	40	5
0/300	H	50	5
0/400	I	50	5
0/600	K	100	10
0/1000	M	200	20
0/1500	N	200	20
0/2000	O	400	50
0/3000	P	500	50
0/5000	R	1000	100
0/10,000	U	1000	100
0/15,000	V	2000	200

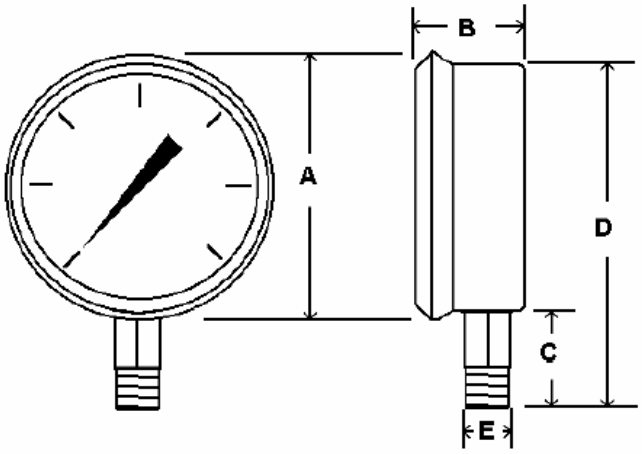

		A	B	C	D	E
2 ½" Dial	In	2.80	1.28	1.07	3.55	1/4" NPT
	MM	71	33	27	90	
*Dimensions subject to change						

4252 Ridge Lea Road, Buffalo, NY 14226, 716-834-2144 FAX: 716-834-2481
www.buffalogauge.com